


12.1" Celeron® J6412

Front IP65 Silver Aluminum Touch IPC

Features

Intel® Celeron® Processor J6412
Dual DDR4 3200MHz SO-DIMM
5 Wires Resistive (single touch)
IP65 Silver aluminum front bezel
3 x USB2.0 , 3 x USB3.1 Gen2 , 2 x RS232, 2 x GLAN, Audio
VESA mount & Panel mount & Clip mount
DC in 12V / 24V

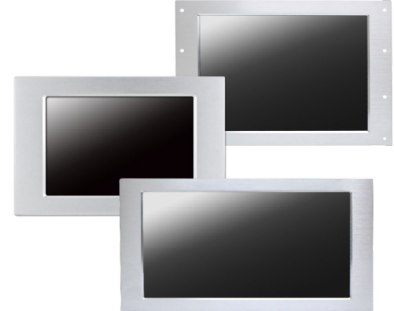

Specifications

Display for 3:4 Ratio			
Size	12.1" TFT		
Resolution	1024 x 768		
Colors	16.7M		
Luminance	350 cd/m2		
Contrast Ratio	800:1		
View Angle	160°/160°		
Model NO.	SP121R901S		
SYSTEM			
CPU	Intel® Celeron® Processor J6412		
Memory	2 x DDR4 3200MHz, Dual Channel SO-DIMM, up to 32GB		
Storage	1 x SATA 3.0 / 64GB Emmc		
OS Support	Windows® 11 (64bit)		
	Windows® 10 (64bit)		
	Linux (Support by request)		
TPM	Infineon® SLB 9672VU2.0		
I/O Ports		* The I/O interface shown may vary depending on the selected motherboard.	
RS232/422/485	1	USB 2.0	3
RS232	1	USB 3.1 Gen 2	3
GLAN	2	AUDIO	1
Expansion Slot			
M.2	1 x M-key 2242/2280 (PCIe Gen.3x2/SATA interface) Support NVME		
	1 x B-key 3042 (USB3.1/USB2.0 interface) support W/SIM card slot		
	1 x E-Key 2230 (USB 2.0/PCIe 3.0 x1)		
MECHANICAL & ENVIRONMENTAL			
Operation	0 ~ 45°C		
Storage	10 ~ 90%, non-condensing		
Form Factor			
Touch Screen	5 Wires Resistive (Single touch)		
Mounting	VESA mount (75 X 75 mm) / (100 X 100 mm) & Panel mount & Clip mount		
Power Supply	3 Pin Power Terminal Block for DC-in 12~24V		

