


15" 17" 19" CF03 N97/N305

Front IP66/67 Silver Aluminum Touch IPC

Features

Intel® Alder Lake-N PC Client & Embedded Series SoC
DDR5 4800 MT/s SODIMM Slot up to 16GB
2 x RS232, 2 x GLAN, 4 x USB 3.2, 1 x Audio
Front IP66/67 aluminum Touch IPC
5 Wires Resistive (Single touch) / True Flat PCT
VESA mount / Panel mount / Clip mount
DC-in 9~36V

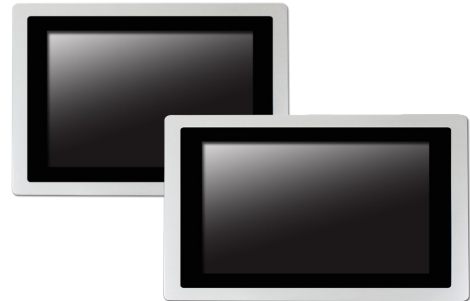

Specifications

Display for 3:4 Ratio			
Size	15" TFT	17" TFT	19" TFT
Resolution	1024 x 768	1280 x 1024	1280 x 1024
Colors	16.7M	16.7M	16.7M
Luminance	300 cd/m2	350 cd/m2	250 cd/m2
Contrast Ratio	2500:1	1000:1	1000 : 1
View Angle	176°/176°	170°/160°	170°/160°
Model NO.	TP150R116S TP170R116S TP190R116S	TP150R117S TP170R117S TP190R117S	
SYSTEM			
CPU	Intel® IOTG Alder Lake-N Processor N97, QC, 12W		Intel® IOTG Alder Lake-N Core i3-N305, OC, 9W up to 15W
Memory	DDR5 4800 MT/s SODIMM Slot up to 16GB		DDR5 4800 MT/s SODIMM Slot up to 16GB
Storage	1 x SATA 3.0		1 x SATA 3.0
OS Support	Windows 10 IoT Enterprise LTSC (64-bit, 21H2) / Windows 11 IoT Enterprise LTSC (64-bit, 24H2) Linux (Support by request)		
TPM	Infineon SLB9672VU2.0		
I/O Ports	* The I/O interface shown may vary depending on the selected motherboard.		
RS232/422/485	1	GLAN AUDIO USB 3.2 Gen1 USB 3.2 Gen2	2
RS232	1		1
HDMI	1		2
DP	1		2
Expansion Slot			
M.2	1 x M.2 B key (SATA/PCIe x1), 2242/3042/2280 1 x M.2 E key (PCIe x1, USB 2.0), 2230		
MECHANICAL & ENVIRONMENTAL			
Operation Temp.	0 ~ 45°C		
Storage	10 ~ 90%, non-condensing		
Form Factor			
Touch Screen	15" / 17" / 19" : PCT / 5W (Single touch) 15" / 15.6" / 17" / 19" / 21.5" / 24" : Projected Capacitive Multi-Touch Panel		
Mounting	VESA mount (100x100mm) & Panel mount & Clip mount		
Power Supply	DC-in 9~36V 3P Power terminal block		
WIFI Optional	External Antenna (Wi-Fi): Supports M.2 Wi-Fi module with external antenna connection for enhanced signal performance		

